

Westell® | CoverEdge™ High-Density Cassettes



General Information

Westell's CoverEdge High-Density Cassettes offer a versatile solution in a compact, durable, form factor that comes pre-configured for patch-only, patch & splice and splitter applications with several choices of industry-standard terminations. This high-density cassette provides up to 24 fiber terminations in a variety of cable stub options of cable types and lengths.

For patch & splice, the high-density cassette is equipped with a molded, 24-fiber splice tray with loose tube, ribbon, 1.0-meter pigtailed that are pre-terminated with slack stored in the cassette and ready for splicing. Adding to its versatility, the high-density cassette can accommodate a splitter module in a variety of ratios.



EPHC2: High-Density Cassette

Product Highlights

- Integrated splice tray with optimized fiber management, and storage
- Removable front panel for quick adapter access and inspection
- Terminations are designed to meet Telcordia GR-326
- Supports industry-standard SC, LC and MPO connectors
- Accommodates loose tube or ribbon mass fusion splicing
- Versatility and flexibility of applications
- Tool-less Mounting via push-pin design


Applications

- MxU—Multiple units (residential, commercial) housed in building/campus
- Central office/data centers
- Cellular backhaul fiber distribution
- Business-Class service delivery
- OSP cabinets

Ordering Information

Note: Not all part numbers/configurations work in practice or may not be purchased. Please contact Westell Customer Service for assistance with your requirements.

Code	Input Connector	Output Connector	Pigtail	Cable Type	Splitter	Mounting Type	Port Count	Stub Length (ft/m)
EPHC2	0 = None	0 = None	0 = None	0 = None	0 = None	C = Spool	T = 12	0 = None
	A = SC/APC	A = SC/APC	R = Ribbon	A = Armored	T = 1x2	D = DIN Rail	M = 24	A = 10/3.05
	S = SC/UPC	S = SC/UPC	T = Loose Tube	R = Riser	F = 1x4	S = Standard		B = 25/7.62
	C = LC/APC	C = LC/APC		P = Plenum	E = 1x8			C = 50/15.25
	L = LC/UPC	L = LC/UPC		S = OSP	S = 1x16			D = 100/30.48
	M = MPO	M = MPO		I = In/Out				E = 200/60.96
								F = 300/91.44
								G = 500/152.4
							H = 1,000/304.8	

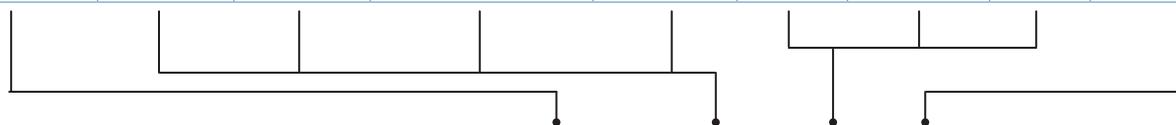

Ordering Example:

EPHC2-0CT0-0SM-0



WESTELL


WESTELL.COM

Westell® | CoverEdge™ High-Density Cassettes



Product Specifications

Dimensions	Cassette: 1.2"H x 6.63"W x 7.35"D
Port Density	SC=12 ports, LC Duplex = 12 or 24 ports
Connector Types	SC/UPC, SC/APC, LC/UPC, LC/APC and MPO
Cable Types	Armored, Riser, Plenum, OSP, Indoor/Outdoor
Splitter Ratios	1x2, 1x4, 1x8, 1x16
Mounting Options	Panel, Enclosure, DIN Rail or Spooling System

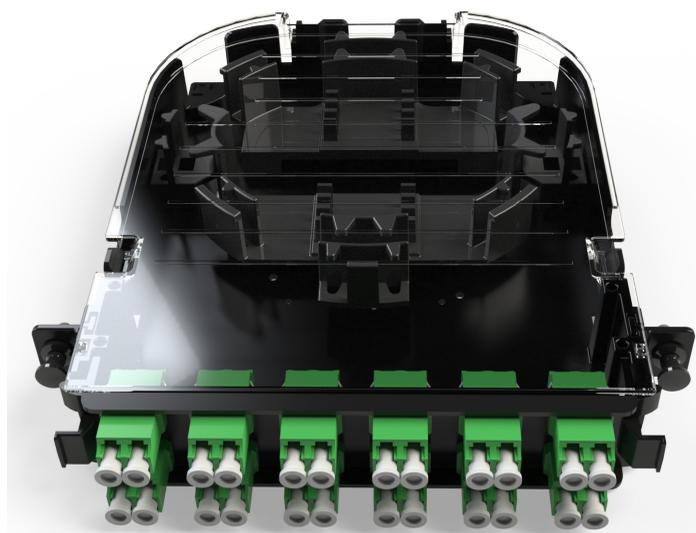

CoverEdge High-Density Cassette - Top View

